

DL30Z

Zigbee-Enabled Digital Keypad Smart Lock



Phone



Passcode



MF Card



NFC



Key



Brief Introduction

DL30Z is a digital keypad smart lock with Zigbee communication. With the additional Zigbee Gateway, you can easily remotely unlock the door lock, check the log history, share the temporary or dynamic passcode, modify the lock's features via ZSmart App, which is a new mobile application for the smart home system.

With its powerful and smart core, you can receive the real-time notifications of low battery, illegal verification attempts, hijack alarm of family members, offline status, and so on. Besides, you can customize conditions to trigger some messages or actions like when a family member goes home.

DL30Z is suitable for private houses, apartments and short-term rental, and greatly brings more security and convenience to your life.

Features



Total Control

Unlock and manage the lock from anywhere via a smart phone



Temporary Access

Share digital keys valid for specific time to friends or guests




Audio Instructions

Easy to operate; support English, Spanish and Portuguese



Smart Alerts

Receive real-time notifications of low battery, hijack and offline



Random Passcode

Secure your passcode from prying eyes




Reversible Design

Fit for all door opening directions


ZSmart App




Remote Access

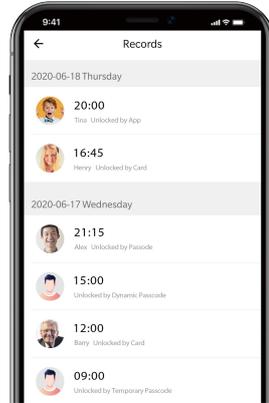

Check Records

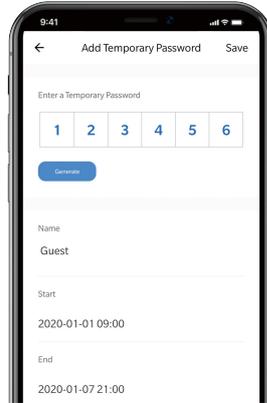

Share Temporary Password

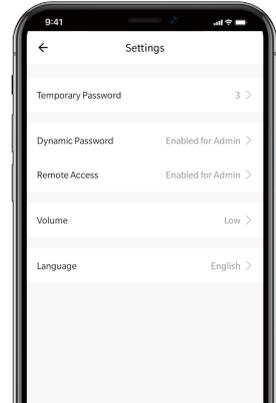

Modify Lock's Features

Applicable Scenarios



Private Houses



Apartments



Short-term Rental

Accessories



Zigbee Gateway


- Compact and simple design
- Easy and fast network configuration
- Full 128-bit encryption
- Support up to 50 sub-devices
- Support US or EU standard 5V, 1A adapter

Specifications

Material	Zinc Alloy (Front) + ABS (Back)
Mortise	American Standard Single Latch German Standard Mortise (optional)
Identification Mode	Smart Phone, Passcode and Card
User Capacity	100
Passcode Capacity	100
Card Capacity	100
Card Reader	Mifare Card & NFC Supported
Audio Prompt	English, Spanish, Portuguese
Communication	Zigbee
Remote Access	Zigbee Gateway required

Power Supply	4xAA Alkaline Battery (not supplied)
Backup Power Interface	9V Battery Supported
Battery Life	Up to 1.5 years (about 10,000 access)
Door Thickness	30-54 mm (standard)
Backset	Adjustable 60 or 70 mm (only for single latch)
Dimensions (W*L*D)	Front – 69*155*35 (mm) Back – 69*155*26 (mm)
Operating Temperature	-20°C to 55°C
Operating Humidity	10%~90% RH (non-condensing)
Certifications	CE-RED, FCC ID

Configuration

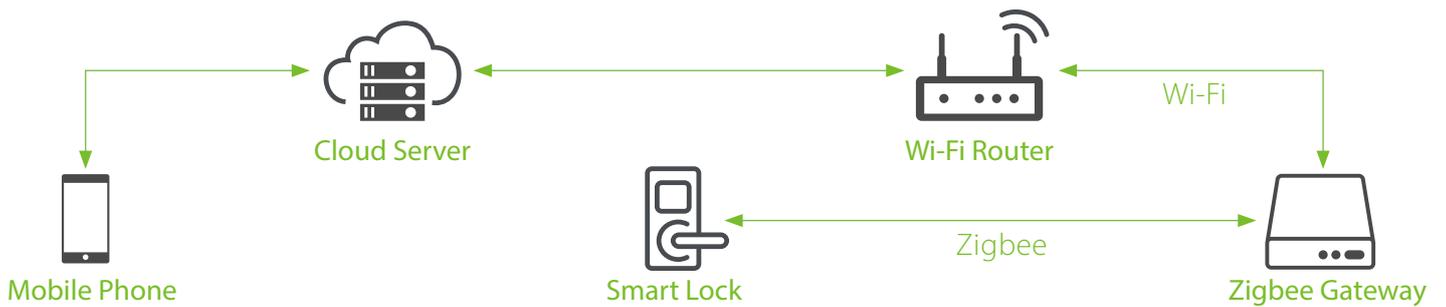

Dimensions

