

Applications














- 18 detection zones
- 500 sensitivity levels
- 7" LCD display
- Separate counting in and out
- TCP/IP communication
- Gate linkage
- Support App
- Simple installation and use
- Synchronous sound & LED alarm

Water-proof bottom

Specifications

Power Supply	AC100V to 240V (DC12V/3A)
Working Temperature	-20°C to 55°C
Working Humidity	<95% (non-condensing)
Working Frequency	5.7KHz to 9.6KHz
Input Voltage	DC12V
Working Current	1.2A
Running Power	14W
Dimension (L*W*H)	2226*845*580 (mm)
Lane Size (L*W*H)	2000*710*498 (mm)
Dimensions of Product with Packaging (L*W*H)	2280*347*660 (mm)
Weight with Packing	52kg

Dimensions (mm)

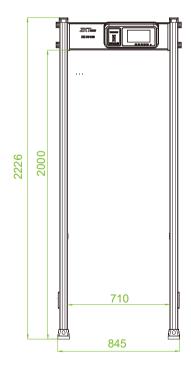



Applicable Scenarios

Locations with high people flow



Schools



Shopping malls



Entertainment venues





